

SAFETY INFORMATION

Please read and understand this entire manual before attempting to assemble, install or operate the product.


WARNING

- RISK OF ELECTRIC SHOCK - Before beginning installation, turn off electricity at the circuit breaker box or the main fuse box.
- RISK OF FIRE - Use bulbs specified by the markings and/or labels on the fixture.

CAUTION

- For your safety, read instructions completely before beginning installation.
- If in doubt about electrical installation, consult a licensed electrician.
- Turn off electricity to fixture before replacing the bulb(s).

TOOLS REQUIRED

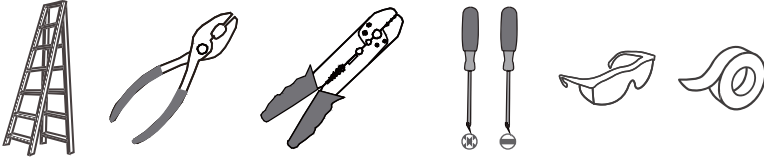


CARE AND MAINTENANCE


- Wipe clean using soft, dry cloth or static duster. Always avoid using harsh chemicals and abrasives to clean fixture as they may damage the finish.

If you need further assistance call Quozel Customer Care at 1-800-645-3184 (9:00am - 5:00pm EST), or visit us on-line at www.quezel.com.

PACKAGE CONTENTS

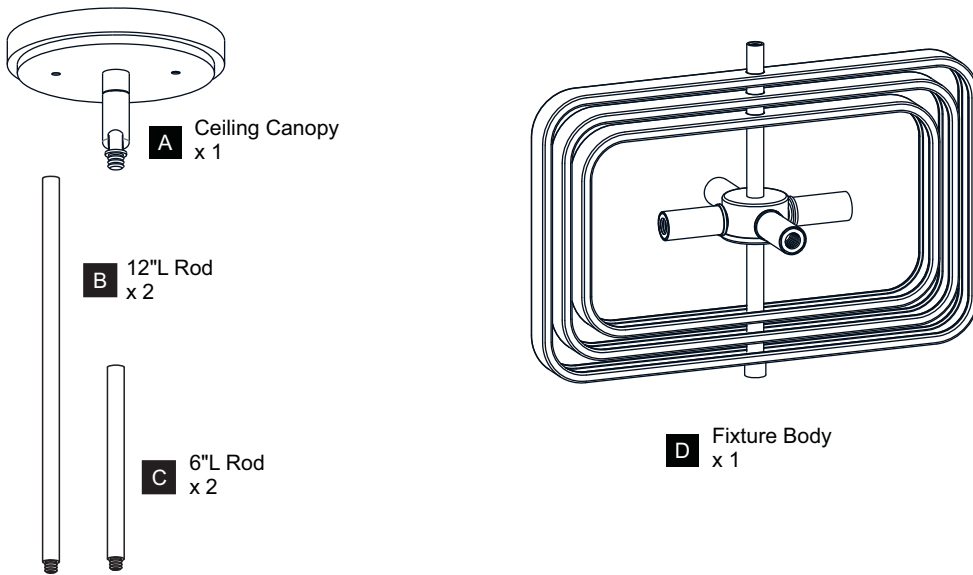


MOUNTING HARDWARE

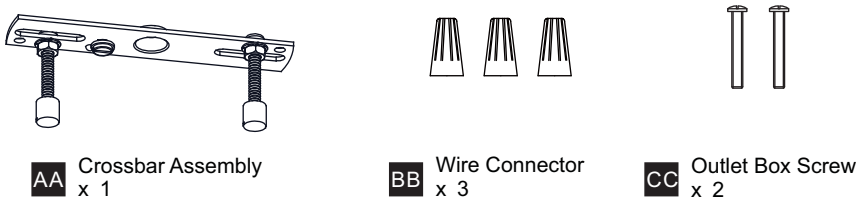

INSTALLATION

OPTION 1: PENDANT PC DPR2814BWS


1 Unfold Fixture Body

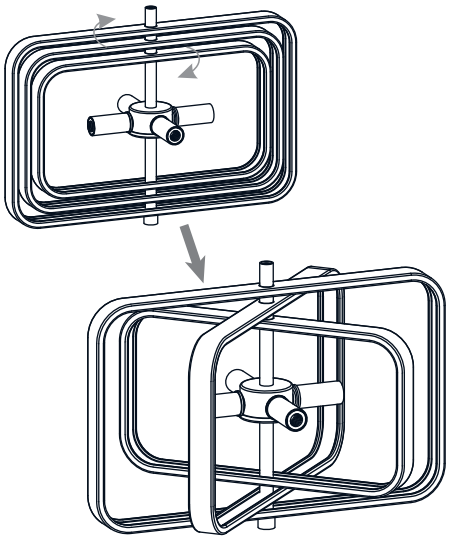


2 Install Rods

Optional Rods:


- 8 Feet Ceiling: (2) 12"L Rods.
- 9 Feet Ceiling: (2) 6"L Rods + (2) 12"L Rods.

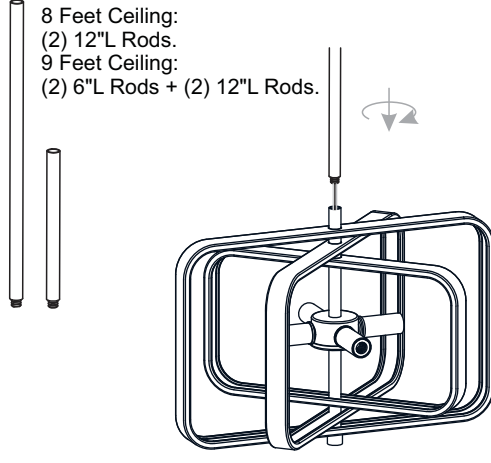

3 Tighten hex nut inside of the ceiling canopy




4 Install Ceiling Canopy to Upper Rod




5 Install Crossbar Assembly

Outlet Box

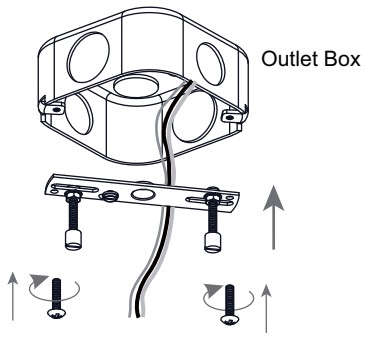

6 Wiring

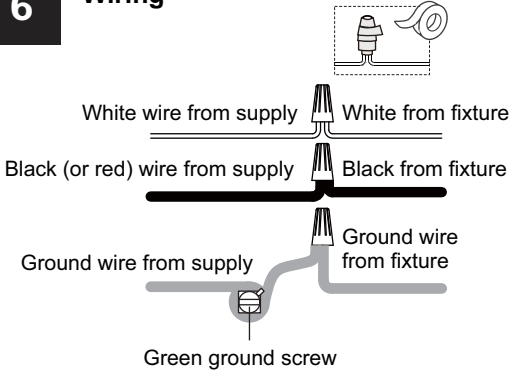


White wire from supply White from fixture

Black (or red) wire from supply Black from fixture

Ground wire from supply Ground wire from fixture

Green ground screw

7 Install Ceiling Canopy to Crossbar Assembly

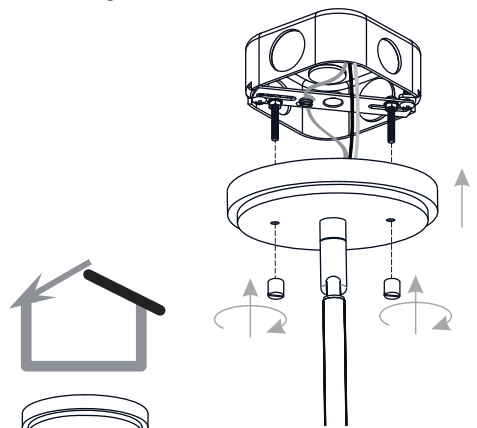



90Degree Swivel

For angled ceilings, Swivel opening towards wall.


8 Install Bulbs

Install four bulbs referring to fixture markings and/or labels for maximum wattage.

Recommended Bulb Type (not included):

	
BULB BASE TYPE Candelabra (E12)	BULB SHAPE TYPE B


60W

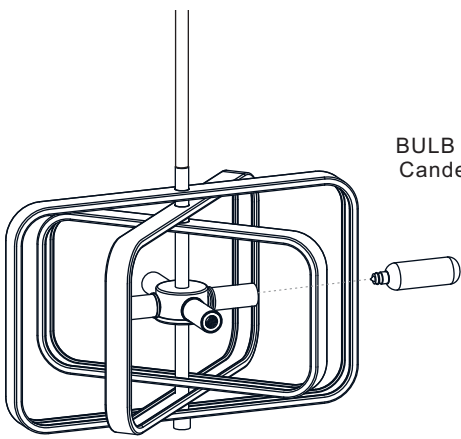

INSTALLATION

OPTION 2: SEMI-FLUSH PCDPR1714BWS

* Set aside the (2) 6"L Rods and (2) 12"L Rods since they are not required for the semi-flush installation.



1 Remove Swivel

Set aside swivel

2 Unfold Fixture Body

3 Install Ceiling Canopy

4 Install Crossbar Assembly

Outlet Box

5 Wiring

White wire from supply White from fixture

Black (or red) wire from supply Black from fixture

Ground wire from supply Ground wire from fixture

Green ground screw

6 Install Fixture to Crossbar Assembly

7 Install Bulbs

Install four bulbs referring to fixture markings and/or labels for maximum wattage.

Recommended Bulb Type (not included):

BULB BASE TYPE
Candelabra (E12)

BULB SHAPE
TYPE B

60W

Your installation is now complete! Restore electricity and save this sheet for future reference.